

DYNAPOINT® CLASSIC

POINT ELASTIC SYSTEM ACC. TO DIN 18032/2 – IHF CERTIFIED

The resilient, seamless sandwich system for indoor sports flooring.

Dynapoint® Classic is composed of a prefabricated rubber mat glued to the substrate with PU adhesive, sealed with polyurethane seal coat, and a minimum of 2 mm of premium polyurethane coating. The pigmented PU top coat is available in a variety of colours.

Tested according to DIN 18032/2.

IHF certified system.


Seamless transition.

Accepts heavy loads.

Ideal multipurpose surface for school and college use.

Available in various thickness from 5mm to 14mm.

Environmentally, friendly and fully DIN/ASTM tested.

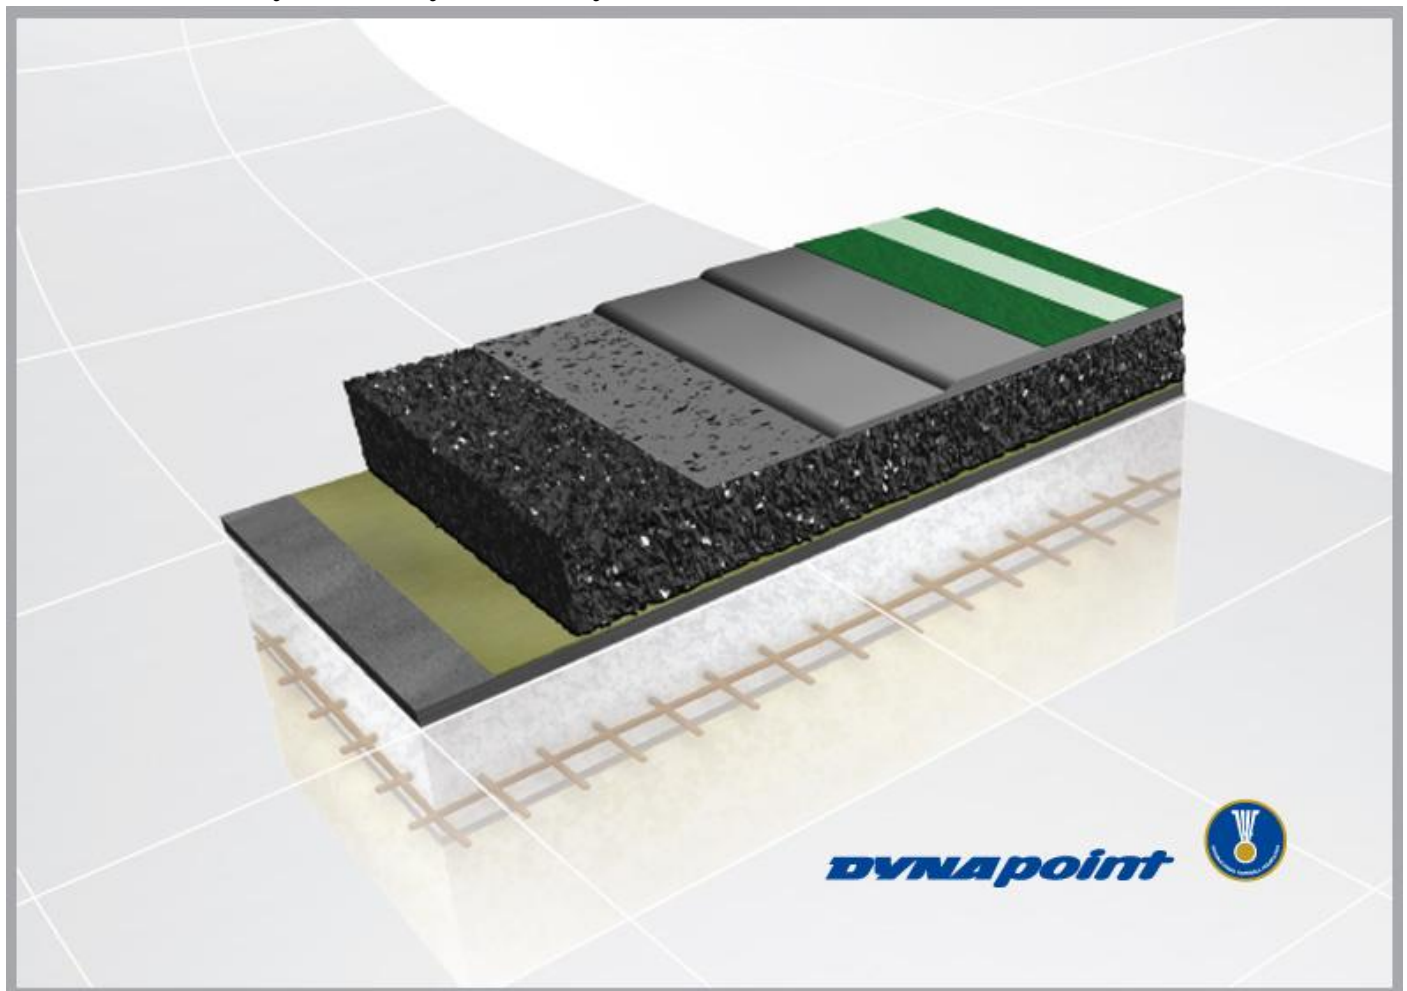

DYNAPOINT® PREMIUM

FULL PU SYSTEM ACC. TO DIN 18032/2 AND IHF SPECIFICATIONS

The resilient, seamless full PU system for indoor sports flooring. Dynapoint® Premium is composed of premium polyurethane coating cast-in-place in two steps. The pigmented PU top coat is available in a variety of colours.

Tested according to DIN 18032/2.

Complies with IHF specifications.

Seamless transition.

Accepts heavy loads.

Available in various thickness from 5mm to 14mm.

Available in various thickness from 5mm to 14mm.

Environmentally, friendly and fully DIN/ASTM tested.

Excellent ball bounce, ball roll and force reduction.

